

# SolarEdge Single Phase StorEdge™ Solutions for North America



### **SolarEdge StorEdge™ Solutions Benefits:**


- More Energy DC-coupled architecture stores PV power directly to the battery without AC conversion losses
- Simple Design & Installation single inverter for PV, battery storage, grid-tied and backup applications
- Enhanced Safety no high voltage during installation, maintenance or firefighting
- Full Visibility monitor battery status, PV production, remaining backup power and self-consumption data



# Solutions for North America **Solutions for North America**

### StorEdge™ Features:

- Smart Energy Management export control, time-of-use shifting, maximized self-consumption, demand response and peak shaving capabilities
- Backup power automatically provides power to backed-up loads in the event of grid interruption
- All-in-one solution uses a single DC optimized phase inverter to manage and monitor both PV generation and energy storage
- Compatible with Tesla Powerwall Home Battery and the LG Chem RESU

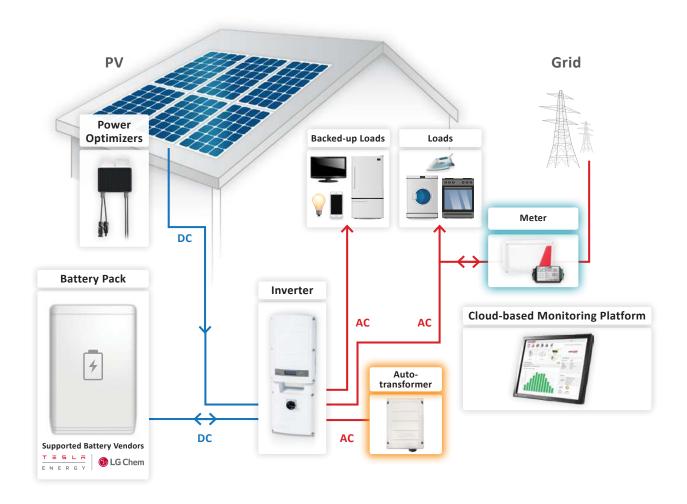

SolarEdge StorEdge <sup>™</sup> Solutions for North America - Product Selector				
	Grid-tied solar, backup power and smart energy management	Grid-tied solar and backup power	Grid-tied solar and smart energy management	
Single Phase StorEdge™ Inverter	✓	✓	✓	
Auto-transformer	✓	✓		
SolarEdge Electricity Meter	✓		✓	
Battery	✓	✓	✓	



## **SolarEdge Single Phase StorEdge Inverter**

for North America SE7600A-US(1)

- Single inverter for PV, grid-tied storage and backup power
- Includes the hardware required to provide automatic backup power to backed-up loads in case of grid interruption
- Includes all interfaces needed for battery connection


SE7600	A-US		
OUTPUT - AC (LOADS/GRID)			3.44
Rated AC Power Output	7600		VA
Max AC Power Output	8350		VA
AC Output Voltage Min-Nom-Max (L-L) <sup>(2)</sup>	211-240-264		Vac
AC Frequency Min-Nom-Max <sup>(2)</sup>	59.3 - 60 - 60.5		Hz
Maximum Continuous Output Current @240V	32		Α
GFDI	1		Α
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes		
Charge Battery from AC (if Allowed)	Yes		
THD	<3		%
Power factor with rated power	>0.99 (configurable; 0.9 l	eading to 0.9 lagging)	
Typical Nighttime Power Consumption	<5		W
OUTPUT - AC (BACKUP POWER)(3)		(0)	
Rated AC Power Output	5000		VA
Max AC Power Output - Surge	7600 for		VA
AC Output Voltage Min-Nom-Max (L-L)	211-240		Vac
AC Output Voltage Min-Nom-Max (L-N)	105-120		Vac
AC Frequency Min-Nom-Max	55 - 60	- 65	Hz
Maximum Continuous Output Current @240V - Backup Mode	21		Α
Max Continuous Output Current per Phase @120V	25		A
GFDI	1		Α
AC Circuit Breaker	Yes		
THD	<5		%
Power factor with rated power	0.2 leading to 0.2 lagging		
Automatic switchover time	<2		sec
Typical Nighttime Power Consumption	<5		W
NPUT - DC (PV and BATTERY)			
Transformer-less, Ungrounded	Yes		
Max Input Voltage	500		Vdc
Nom DC Input Voltage	400		Vdc
Reverse-Polarity Protection	Yes		
Ground-Fault Isolation Detection	600kΩ Ser	sitivity	
Maximum Inverter Effciency	98		%
CEC Weighted Effciency	97.5		%
NPUT - DC (PV)			
Maximum DC Power (STC)	10250		W
Max Input Current <sup>(5)</sup>	23		Adc
2-pole Disconnection	Yes		
NPUT - DC (BATTERY)			
Continuous Peak Power	3300		W
Number of Batteries per Inverter <sup>(6)</sup>	1	2 for high capacity	
Supported Battery Types	LG Chem RESU 10H	Tesla Powerwall 1	
Max Input Current	Tesla Powerwall 1 8.5		Adc
2-pole Disconnection	e.5 Yes		
DC Fuses on Plus and Minus	12A (field rep		
ADDITIONAL FEATURES	12A (Held Te)	naccasicj	
Supported Communication Interfaces	RS485 for battery, RS485, Et	hernet, ZigBee (ontional)	
Battery Power Supply	Yes, 12V / 53W		
Revenue Grade Data, ANSI C12.1			
Integrated AC, DC and Communication Connection Unit	Optional <sup>(7)</sup>		
AC Disconnect	Yes		
AC DISCOUNTELL	Yes		
	Voc		
Manual Inverter Bypass Switch DC Voltage Rapid Shutdown (PV and Battery)	Yes Yes, according to N	FC 2014 690 12	

<sup>(1)</sup> These specifications apply to inverters with part numbers SE7600A-USS0XXXXX and connection unit model number BCU-1PH-USS (2) For other regional settings please contact SolarEdge Support (3) Not designed for standalone applications and requires AC for commissioning (4) The rated AC power output is the minimum between S000VA and the battery continuous peak power (5) A higher current source may be used; the inverter will limit its input current to the values stated (6) For two batteries for double power contact SolarEdge technical support (7) Revenue grade inverter P/N: SE7600A-USS02NNG2



SE7600A-USS STANDARD COMPLIANCE				
Grid Connection Standards	IEEE1547, Rule 21, Rule 14			
Emissions	FCC part15 class B			
INSTALLATION SPECIFICATIONS				
AC Output (Loads/Grid) conduit size / AWG range	1" / 14-6 AWG			
AC Output (Backup) conduit size / AWG range	0.75-1" knockouts / 14-6 AWG			
AC Input (Auto-transformer) conduit size / AWG range	0.75-1" / 14-6 AWG			
DC Input (PV) conduit size / AWG range	0.75" / 14-8 AWG			
DC Input (Battery) conduit size / AWG range	0.75" / 16-10 AWG			
Dimensions with Connection Unit (HxWxD)	37 x 12.5 x 7.2 / 940 x 315 x 184	in / mm		
Weight with Connection Unit	58.5 / 26.5	lb / kg		
Cooling	Natural convection and internal fan (user replaceable)			
Noise	<50	dBA		
Min - Max Operating Temperature	-13 to +140 / -25 to +60	°F/°C		
Protection Rating	NEMA 3R			

### **Inverter Interface**

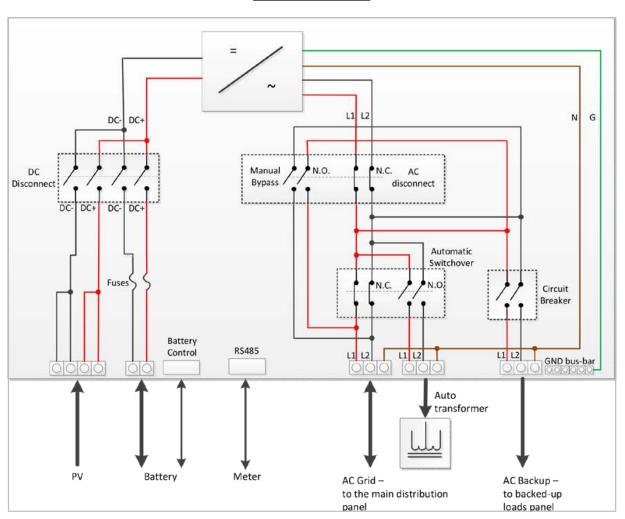



SEAUTO-TX-5000

	SEAUTO-TX-5000	
ELECTRICAL RATINGS		,
Rated Power - Continuous	5000	VA
Rated Power - Peak	7600 for 10sec	VA
Output Voltage	120/240V Split Phase	
Max Continuous Output Current per Phase @120V	25	A
Split Phase Imbalance (@Rated Power)	Yes, up to 25A difference between phases	
Thermal Protection	Yes	
INSTALLATION SPECIFICATIONS		
AC Output conduit size / AWG range	0.75" / 14-6 AWG	
Dimensions (HxWxD)	6.7 x 7.9 x 5.5 / 170 x 200 x 140	in / mm
Weight	29.7 / 13.5	lb / kg
Min - Max Operating Temperature	-13 to +140 / -25 to +60	°F/°C
Protection Rating	NEMA 3R	
Installation	Wall mounted	





SE-MTR240-2-200-S1 / SE-MTR240-2-400-S1

For meter specifications refer to: http://www.solaredge.us/files/pdfs/products/se\_electricity\_meter\_na.pdf



