

SLP012-12

High Efficiency Multicrystalline PV Module



Certified and Listed to
UL1703 and CUL1703 Standards



Electrical Characteristics	SLP012-12
Product code	012011232
Maximum power (P _{max})	12W
Voltage at P _{max} (V _{mp})	17.0V
Current at P _{max} (I _{mp})	0.70A
Open-circuit voltage (V _{oc})	21.6V
Short-circuit current (I _{sc})	0.77A
Temperature coefficient of V _{oc}	-(80±10)mV/°C
Temperature coefficient of I _{sc}	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	30V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C


*NOCT: Nominal operating cell temperature (the data is only for reference)

Module Diagram

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]

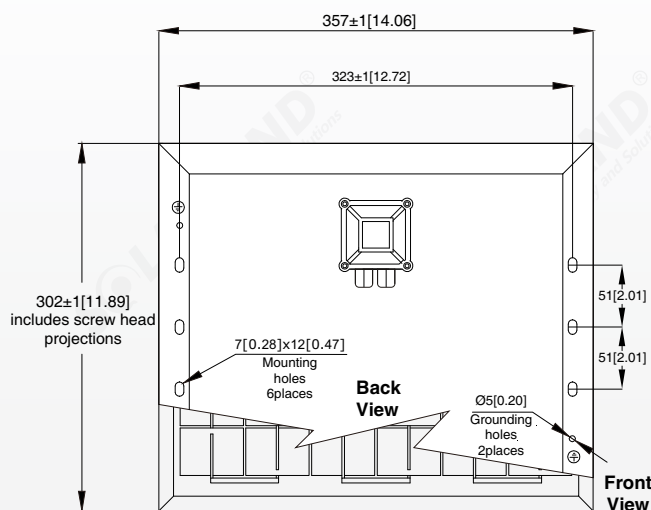

Junction Box
Top View (Lid Open)




Section A-A

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

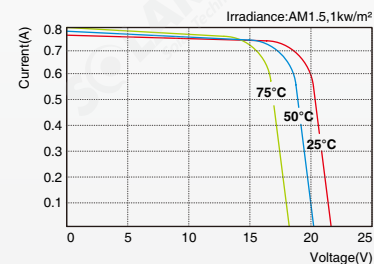

SLP012-12 I-V Curves

Specifications	SLP012-12
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(6X6)
Module dimension	302mm[11.89in.]x357mm[14.06in.]x30mm[1.18in.]
Weight	1.6kg[3.53lbs]
Packing information(Carton)	400mm[15.75in.]x335mm[13.19in.]x385mm[15.16in.]/(10pcs/ctn)

*Limited warranty: 1-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.